

STRONG

Mbps
3000
Mbit/s

UNIVERSAL WI-FI REPEATER 300 REPEATER300SUK

Boost your Wi-Fi network!



4 Years
warranty

Looking for a solution to enhance Wi-Fi signals specific areas of your home?

Introducing the REPEATER300SUK from STRONG: Boost your Wi-Fi coverage effortlessly with our latest innovation. With a maximum speed of 300 Mbps, this compact wall plug solution ensures seamless coverage throughout any space. Equipped with 2 adjustable external antennas and a smart LED system, it gets easier placing at home the repeater for optimal performance. Upgrade your Wi-Fi experience with the REPEATER300SUK from STRONG.

Performance



- Supports 802.11n/b/g standards.
- 300 Mbps @ 2.4 GHz.
- Works with any standard modem or router.

Coverage & Reliability



- 2x Adjustable external antennas for maximum coverage and reliability.
- Smart LED system for an optimum positioning of the repeater: LAN, Power, 3 x Wi-Fi signal strength.

Security



- WPA-PSK/ WPA2-PSK encryption for the highest level of Wi-Fi security.
- Connect & Secure button for an easy set up and a maximum network security.
- Power on/off button.

Connections



- 1x Ethernet LAN port to connect any computer, set-top-box, Smart TV, game console, ...



UNIVERSAL WI-FI REPEATER 300

REPEATER300SUK

Wi-Fi

Frequency	2.4 GHz
Standards	IEEE 802.11b/g/n
Signal Rate	Up to 300 Mbps
Security	WPA-PSK/ WPA2-PSK encryption
Antenna	2x 3 dBi omnidirectional, adjustable
Transmit Power	Europe: <20 dBm (2.4 GHz)
Supported Channels	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13
Features	Enable/Disable, Client Isolation

Hardware

Ethernet Ports	1x 10/100 Mbit/s LAN port (Auto MDI/MDIX)
Buttons	Connect & Secure (WPS)
LEDs	LAN, Power, 3 x Wi-Fi signal strength
Power	Internal, 100-240 V, 50/60 Hz, 0.1 A
Standards	IEEE 802.11b/g/n

Software

Configuration Wizards	Repeater
WAN Type	Dynamic IP, Static IP, PPPoE
DHCP	Auto, Server, Client

Management


Web User Interface, Time Settings, Configuration Backup/Restore, Firmware Upgrade

Internet Protocol

IPv4

Other specifications

Certification	CE
Package contents	1x Universal Wi-Fi Repeater 300 1x Installation instructions
System requirements	Windows 7, 8, 8.1, 10, Mac OS X, Linux, Internet Browser
Environment	Operating temperature: 0° C ~ +40° C Storage temperature: -10° C ~ +70° C Operating humidity: 10%~90% non-condensing Storage humidity: 10%~90% non-condensing
Size (WxDxH):	57 x 68,39 x 78,7 mm
Size with antenna (WxDxH):	57 x 68,39 x 141 mm
Weight:	87.3g

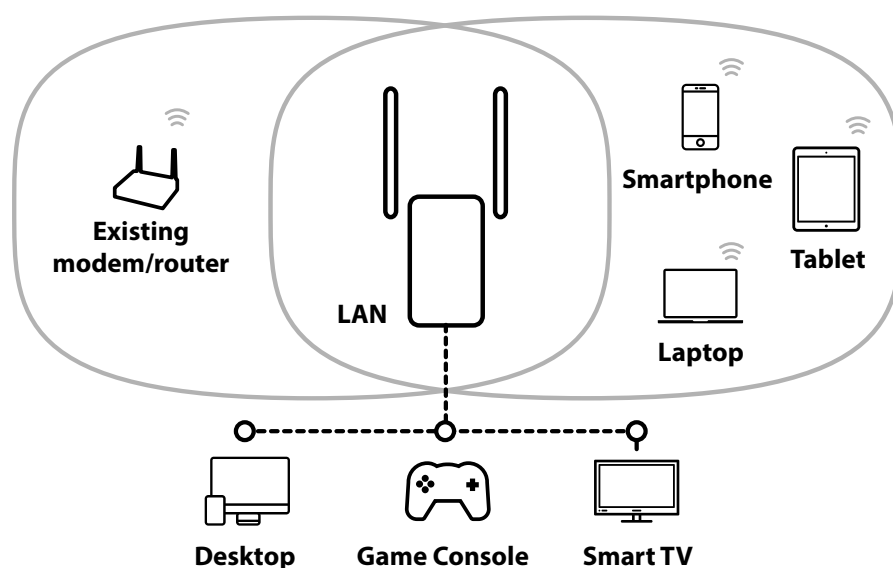

REPEATER300SUK EAN: 9120072378133

PCB: 20

In consequence of continuous research and development technical specifications, design, picture and appearance of products may change without notice. STRONG shall not be responsible in any manner relating to the logos, brands and/or trademarks displayed herein which are not registered by STRONG. All product names are trademarks or registered trademarks of their respective owners. Wi-Fi is a registered trademark of Wi-Fi Alliance. Data throughput, distance, signal range, and coverage area per m² are used only for reference and based on performance test results under normal use case conditions. Actual performances are not guaranteed and may vary due to differences in operating environments, distance and positioning of the products, mix of products used, building materials, wireless and electrical interferences and other adverse conditions.

© STRONG 2026. All rights reserved.